



Optimize Multidimensional Print- Quality Reports with Report Designer

Copyright Page

This document supports Pentaho Business Analytics Suite 5.2 GA and Pentaho Data Integration 5.2 GA, documentation revision October 7, 2014, copyright © 2014 Pentaho Corporation. No part may be reprinted without written permission from Pentaho Corporation. All trademarks are the property of their respective owners.

Help and Support Resources

To view the most up-to-date help content, visit <https://help.pentaho.com>.

If you do not find answers to your questions here, please contact your Pentaho technical support representative.

Support-related questions should be submitted through the Pentaho Customer Support Portal at <http://support.pentaho.com>.

For information about how to purchase support or enable an additional named support contact, please contact your sales representative, or send an email to sales@pentaho.com.

For information about instructor-led training, visit <http://www.pentaho.com/training>.

Liability Limits and Warranty Disclaimer

The author(s) of this document have used their best efforts in preparing the content and the programs contained in it. These efforts include the development, research, and testing of the theories and programs to determine their effectiveness. The author and publisher make no warranty of any kind, express or implied, with regard to these programs or the documentation contained in this book.

The author(s) and Pentaho shall not be liable in the event of incidental or consequential damages in connection with, or arising out of, the furnishing, performance, or use of the programs, associated instructions, and/or claims.

Trademarks

The trademarks, logos, and service marks ("Marks") displayed on this website are the property of Pentaho Corporation or third party owners of such Marks. You are not permitted to use, copy, or imitate the Mark, in whole or in part, without the prior written consent of Pentaho Corporation or such third party. Trademarks of Pentaho Corporation include, but are not limited, to "Pentaho", its products, services and the Pentaho logo.

Trademarked names may appear throughout this website. Rather than list the names and entities that own the trademarks or inserting a trademark symbol with each mention of the trademarked name, Pentaho Corporation states that it is using the names for editorial purposes only and to the benefit of the trademark owner, with no intention of infringing upon that trademark.

Third-Party Open Source Software

For a listing of open source software used by each Pentaho component, navigate to the folder that contains the Pentaho component. Within that folder, locate a folder named licenses. The licenses folder contains HTML files that list the names of open source software, their licenses, and required attributions.

Contact Us

Global Headquarters Pentaho Corporation Citadel International, Suite 460

5950 Hazeltine National Drive Orlando, FL 32822

Phone: +1 407 812-OPEN (6736)

Fax: +1 407 517-4575

<http://www.pentaho.com>

Sales Inquiries: sales@pentaho.com

Introduction

This section provides you with instructions and recommendations for designing aggregate tables for Mondrian ROLAP models. The use of aggregate tables can dramatically improve the query performance of analysis solutions.

Assumptions


This document is written for Database Administrators and consultants who design specific aggregate tables or get recommendations for aggregate tables based on an intelligent adviser algorithm. It is assumed that you, the reader, have a strong understanding of database design and concepts (such as database modeling, SQL security, and performance), and are familiar with aggregate table concepts.

Pentaho Aggregation Designer Overview

The Pentaho Aggregation Designer simplifies the creation and deployment of aggregate tables that improve the performance of your Pentaho Analysis (Mondrian) OLAP cubes. Pentaho Analysis is a pure, relational OLAP engine that works solely with the data stored in your relational database rather than providing its own multidimensional data storage model. This simplifies deployment and data management, but places limitations on performance when working with very large data sets (fact tables with more than 10 million records and/or cubes with a high cardinality of levels and members). To improve performance in these scenarios, Pentaho Analysis supports aggregate tables. Aggregate tables coexist with the base fact table and contain pre-aggregated measures built from the fact table. This improves performance by enabling the Mondrian engine to fulfill certain summary level queries from the smaller aggregate table versus aggregating a large number of individual facts from the base fact table.


The Pentaho Aggregation Designer provides you with a simple interface that allows you to create aggregate tables from levels within the dimensions you specify. Based on these selections, the Aggregation Designer generates the Data Definition Language (DDL) for creating the aggregate tables, the Data Manipulation Language (DML) for populating them, and an updated Mondrian schema which references the new aggregate tables. If you are unfamiliar with aggregate table design concepts, the Aggregation Designer also includes an intelligent adviser that evaluates the structure and cardinality of your OLAP cube and recommends some initial aggregate tables to create for improving performance.

The components of the Pentaho Aggregation Designer workspace are shown below:

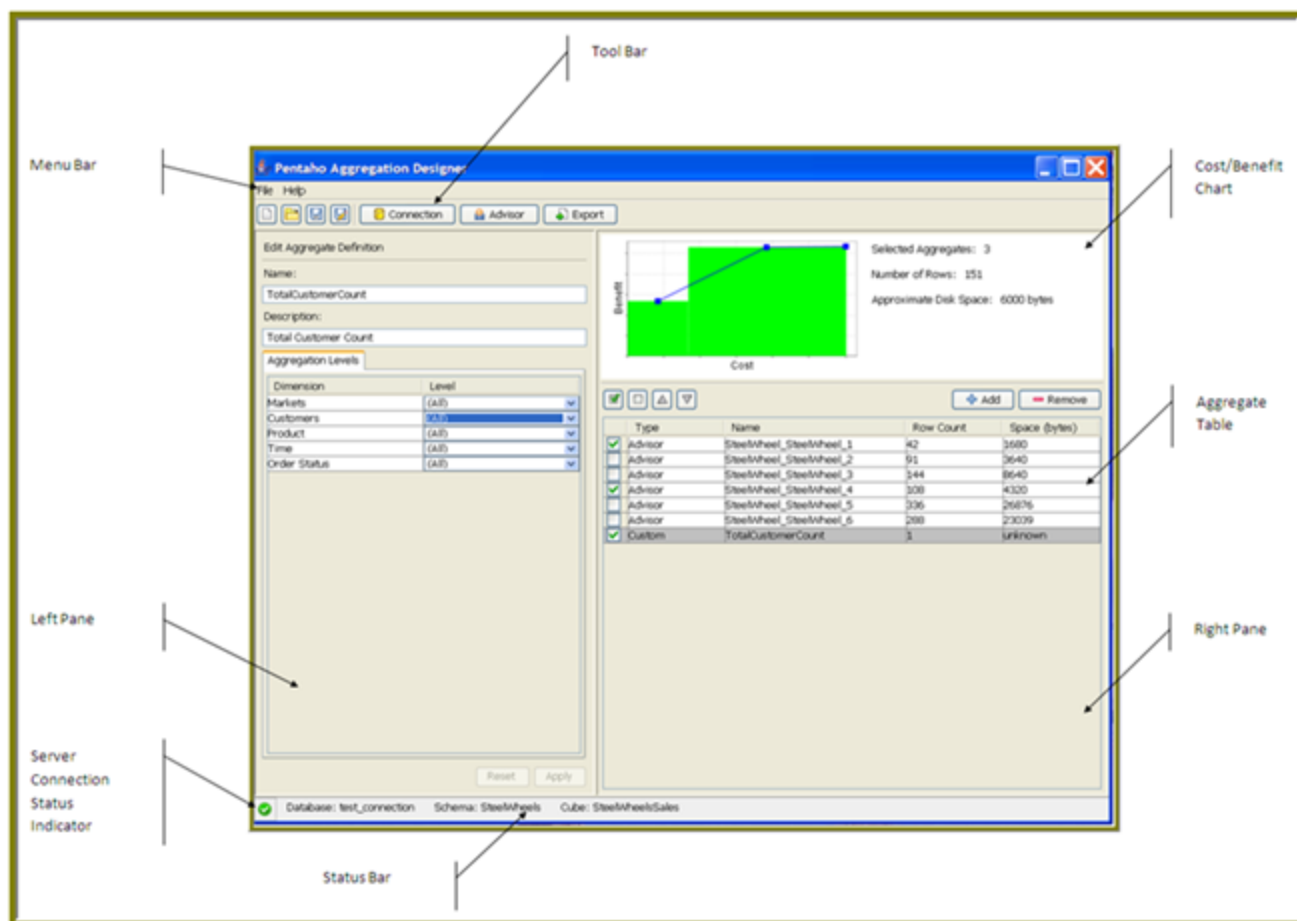

Defining the Data Source

To design an aggregate table, you must first establish a connection with your target relational database, then select the OLAP model to optimize. You can connect to any relational database that is supported by Mondrian. In some instances, you may need to define additional parameter-related values for your JDBC driver.

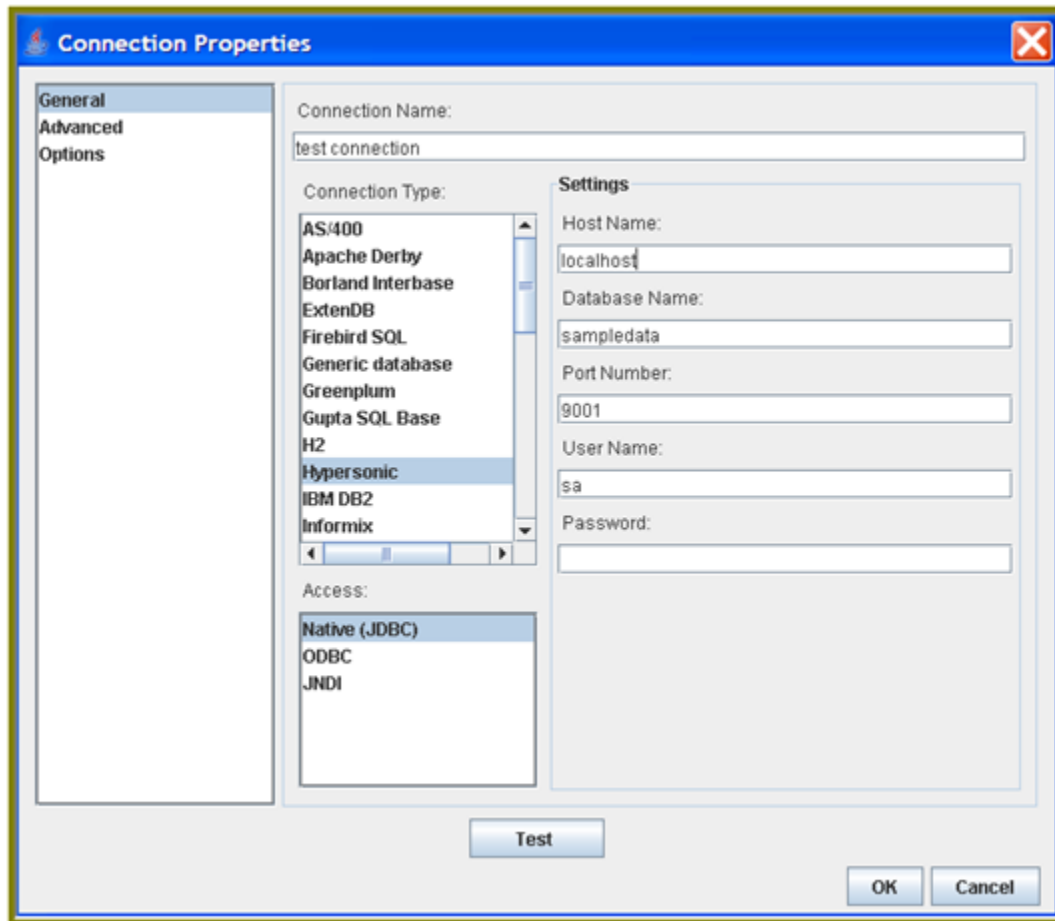

To define a data source connection...

1. In the Pentaho Aggregation Designer tool bar, click **Connection** to open the **Connect to Data Source** dialog box.
2. Click **Configure**. The **Connection Properties** dialog box appears.
3. In the **Connection Name** field, enter a name for your connection; this is a free-text field. A connection name uniquely defines a connection.
4. In the **Connection Type** list, select a database.
5. In the **Access** list, keep the default choice, which should be **Native (JDBC)**.
6. In the **Settings** section, type the host name of the database server into the **Host Name** field. In the **Database Name** field, type the name of the database you're connecting to. In the **Port Number** field,

enter the TCP port number. Optionally, in the **User Name** and **Password** fields, type the user name and password used to connect to the database.

7. Click **Test**. If the settings you typed in are correct, a success message appears.
8. Click **OK**.

- [Defining Additional JDBC Driver Parameters](#)

Related tasks

[Defining Additional Parameters](#)

Defining Additional JDBC Driver Parameters

If you must define additional parameters for your JDBC driver, or if you want to enter your server settings manually, follow the instructions below:

1. Click **Options** in the left panel..
2. Enter the parameter name and value for the settings you need to specify. For example, **PORT** (parameter name), **1025** (parameter value).
3. Click **Test** when your settings are entered. A success message appears if everything was typed in correctly.
4. Click **OK**.

Selecting a Model


After defining your data source, you must select the cube you want to use for defining and building aggregate tables.

To select a model...

1. In the **Connect to Data Source** dialog box, under **OLAP Model**, select **Mondrian Schema File**.
2. Click the ellipsis (...) to display a file dialog box.
3. Browse to locate and select your Mondrian schema file (SteelWheels.mondrian.xml if using sample data), then click **OK**.
4. Click **Apply**. The Cube list is populated with a list of cubes defined in your schema.
5. Select the Mondrian cube you want to optimize, then click **Connect**. When the Pentaho Aggregation Designer establishes a connection, it runs several validation tests to ensure that your database structure is ready to support aggregate tables. A validation summary dialog box appears with a list of test results. If you see an error message, contact your database administrator.

Getting Recommendations Using Aggregate Advisor

If you are unfamiliar with aggregate table design and need help creating aggregates to optimize a cube, you can rely on the Aggregate Advisor to provide you with a list of recommendations. The Pentaho Aggregation Designer uses your schema file and the data in your database to create aggregate definitions.

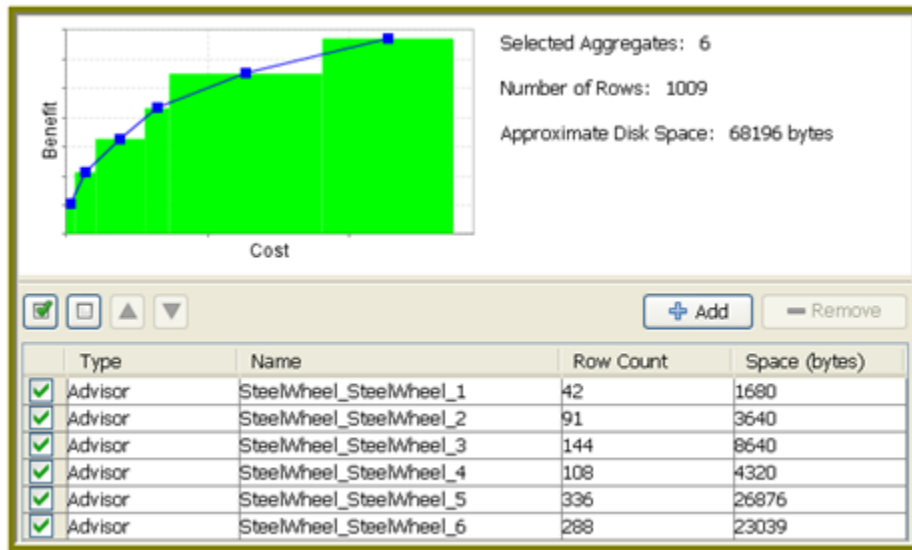

To display recommended aggregates...


1. In the Pentaho Aggregation Designer toolbar, click **Advisor**.
2. Specify your **Advisor Input Parameters**.

Setting	Description
Max Aggregates	Allows you to specify the maximum number of aggregates you want the Advisor to recommend.
Max Time to Run	Allows you to specify the maximum amount of time (in seconds) you want the Advisor to run before making recommendations. Note: Allowing the Advisor to run for longer periods of time allows for more potential recommendations to be evaluated and results in more accurate recommendations.

3. Click **Recommend**. The Advisor runs for a few seconds before it displays an initial list of recommended aggregates. The Advisor is designed to keep running until it finds an optimal solution. If you stop the Advisor prematurely, the Advisor returns the best set of recommendations it has found up to the point when it was stopped.

Customizing Aggregates

When you select an aggregate, the Pentaho Aggregation Designer pulls information from the schema file to display its dimensions and levels. You can modify any aggregate the Pentaho Aggregation Designer recommends, customizing it for your needs. You can also create an aggregate from scratch and delete aggregates you do not want.

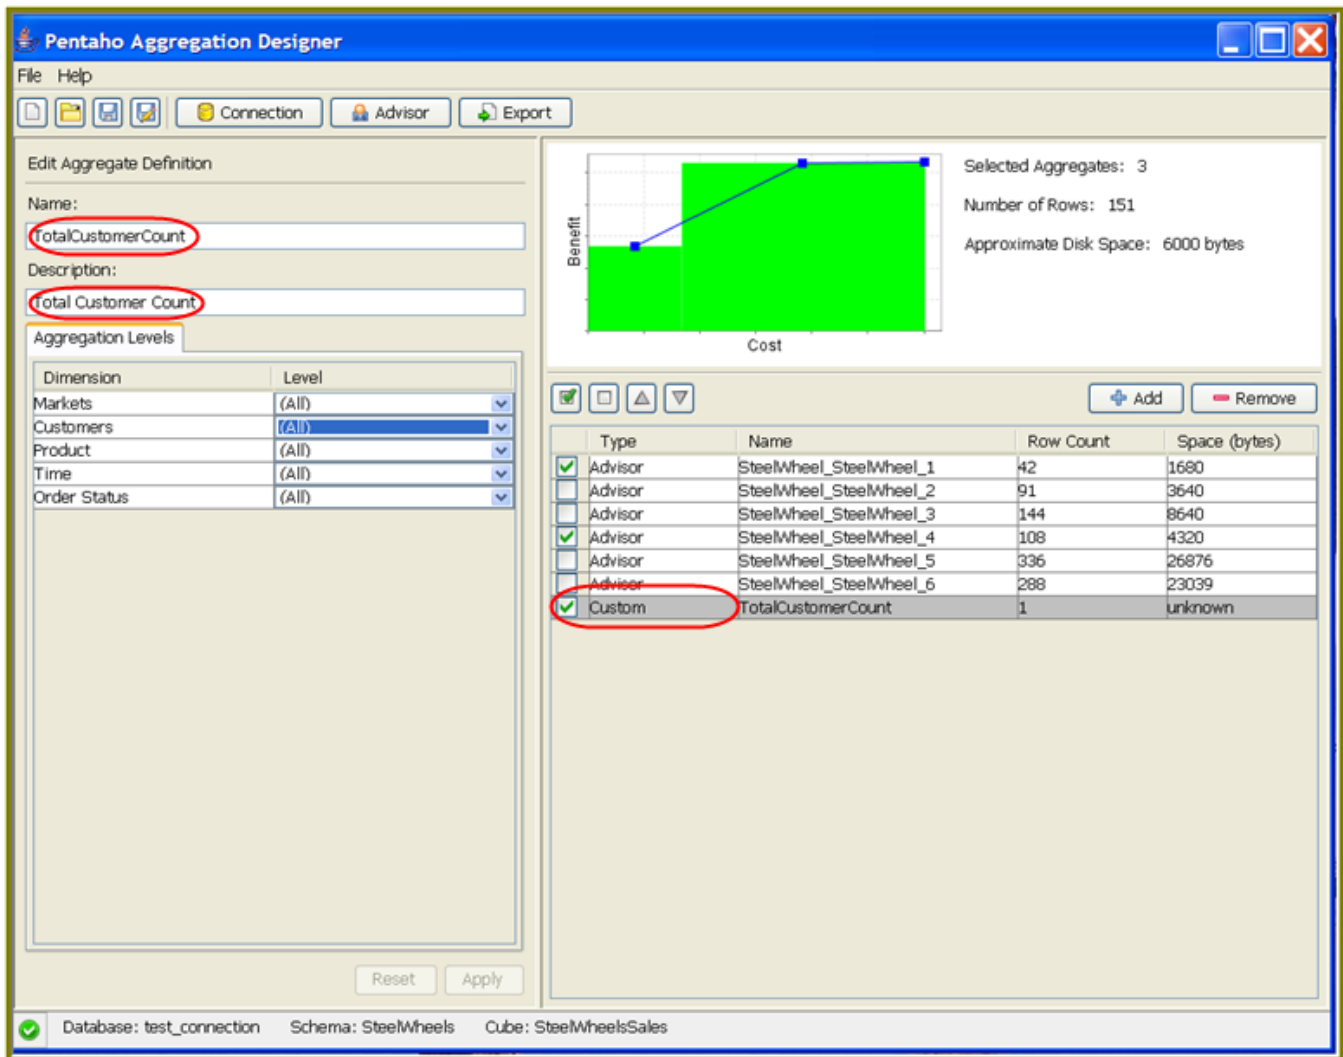

Pentaho Aggregation Designer

File Help

Connection Advisor Export

Edit Aggregate Definition

Name: TotalCustomerCount

Description: Total Customer Count

Aggregation Levels

Dimension	Level
Markets	(All)
Customers	(All)
Product	(All)
Time	(All)
Order Status	(All)

Selected Aggregates: 3
Number of Rows: 151
Approximate Disk Space: 6000 bytes

Benefit

Cost

Add Remove

Type	Name	Row Count	Space (bytes)
<input checked="" type="checkbox"/> Advisor	SteelWheel_SteelWheel_1	42	1680
<input type="checkbox"/> Advisor	SteelWheel_SteelWheel_2	91	3640
<input type="checkbox"/> Advisor	SteelWheel_SteelWheel_3	144	8640
<input checked="" type="checkbox"/> Advisor	SteelWheel_SteelWheel_4	108	4320
<input type="checkbox"/> Advisor	SteelWheel_SteelWheel_5	336	26876
<input type="checkbox"/> Advisor	SteelWheel_SteelWheel_6	288	23039
<input checked="" type="checkbox"/> Custom	TotalCustomerCount	1	unknown

Reset Apply

Database: test_connection Schema: SteelWheels Cube: SteelWheelsSales

Impact summary

The impact summary in the lower right pane provides you with information on the estimated impact for creating all of the currently selected aggregates. This summary includes the number of aggregate tables that will be created, the estimated number of rows contained in those tables, and the estimated amount of space it

will occupy on the hard drive. The impact summary is automatically updated as you select and deselect aggregates from the list of proposed aggregates.

Cost/benefit chart

The Cost/Benefit chart provides a high-level comparison of the benefit of all currently selected aggregates relative to their estimated cost. The benefit scale represents the relative number of queries that can be fulfilled by an aggregate table versus having to be retrieved from the base fact table. The cost scale is an indicator of the impact in terms of number of tables and disk space needed to create the selected aggregate recommendations.

Saving your design

The Pentaho Aggregation Designer allows you to save all aggregate-related data (custom- or advisor-created) in your workspace at any time. Saving ensures that all of the data (your designs) in the workspace is retained; you are saving the state of your workspace as an XML file in a location you specify. To save, go to the **File** menu and click **Save As**. To open a saved file, go to the **File** menu and click **Open**, then navigate to the design you previously saved.

- [Customizing an aggregate](#)
- [Adding Aggregates](#)
- [Deleting Aggregates](#)

Customizing an aggregate

To customize an aggregate...

1. In the **Pentaho Aggregation Designer**, click on an aggregate in the proposed aggregate list to select it.
Note: When you modify an aggregate created using the Advisor, the aggregate becomes a Custom aggregate as indicated by the Type column in the proposed aggregate list.
2. In the left pane, you can (optionally) modify the **Name** and **Description** for your custom aggregate.
3. In the **Aggregation Levels** tab, click the down arrows to make changes to the hierarchy and levels associated with the aggregate definition you are customizing.
4. Click **Apply** . The Pentaho Aggregation Designer updates the proposed aggregate list, cost/benefit chart, and impact summary.

Adding Aggregates

To add an aggregate...

1. In the right pane of the Pentaho Aggregation Designer, click **Add**.
2. In the left pane, type a **Name** and **Description** for your new aggregate.
3. Under **Level**, click the down arrows to define the hierarchy and levels associated with the aggregate you are creating.
4. Click **Apply**. Your aggregate is added to the aggregate list.

Deleting Aggregates


To delete an aggregate, select it from the proposed aggregate list and click **Remove**.

Exporting Aggregates

The Pentaho Aggregation Designer allows you to preview the DDL, DML, and schema (for relational databases) outputs before you build aggregate tables. You can also save the outputs and edit them later. If you are using OLAP, DML is the only available output.

To preview the DDL and DML outputs...

1. Select the aggregates that have DML/DDL output you want to preview.
2. In the Pentaho Aggregation Designer toolbar, click **Export**.
3. In the Execute and Publish dialog box, click **Preview**.

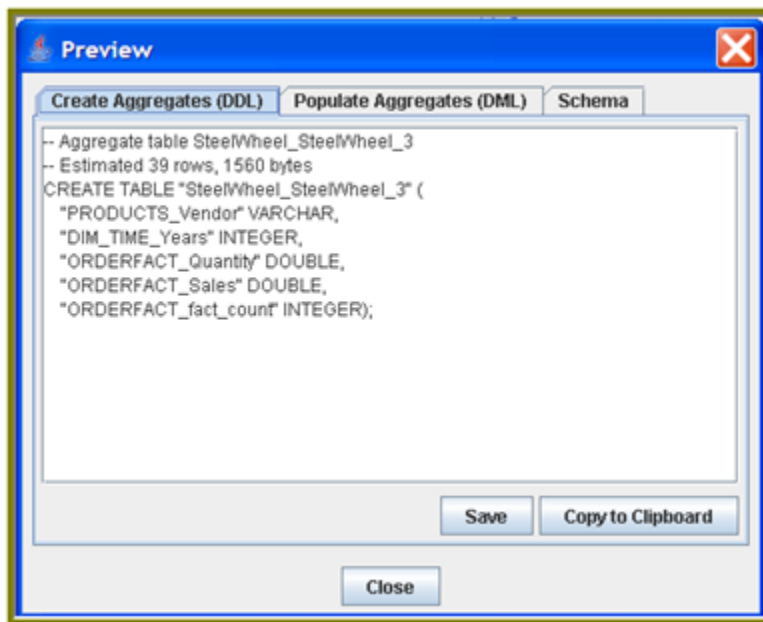

4. Click **Copy to Clipboard** or **Save** to retain the output.
5. If you examine the DDL/DML outputs and are satisfied with the results, you can allow the Pentaho Aggregation Designer to build (Execute/Publish) the aggregate tables. Follow the instructions for publishing and exporting included in the **Execute and Publish** dialog box.



Glossary of Terms

Below is a list of terms used in this document.

- [Aggregate](#)
- [Aggregate Tables](#)
- [Aggregation](#)
- [Data Definition Language \(DDL\)](#)
- [Mondrian Schema](#)
- [Relational Online Analytic Processing \(ROLAP\)](#)
- [Snowflake Schema](#)

Aggregate

Definitions for aggregate tables that help optimize a cube; also, summarized data.

Aggregate Tables

Coexists with the base fact table, and contains pre-aggregated measures built from the fact table. It is registered in Mondrian's schema, so that Mondrian can choose whether to use the aggregate table rather than the fact table, if applicable for a particular query.

Related information

[Introduction to Aggregate Tables](#)

Aggregation

The process of merging multiple data values into one value. For example, sales data collected daily can then be aggregated to the week level, the week data could be aggregated to the month level, and so on. The data can then be referred to as aggregate data. Aggregation and summarization are synonyms, as are aggregate data and summary data.

Data Definition Language (DDL)

Originally a subset of SQL, this language defines data structures, including rows, columns, tables, indexes, and database specifics such as file locations. DDL SQL statements are more a part of the database management system, and have large differences between SQL implementations.

Related information

[Data Definition Language](#)

Mondrian Schema

Defines a multi-dimensional database. A Mondrian schema contains a logical model, consisting of cubes, hierarchies, and members, and a mapping of this model onto a physical model. The logical model consists of the constructs used to write queries in the MDX language: cubes, dimensions, hierarchies, levels, and members. The physical model is the source of the data presented through the logical model. It is typically a star schema, which is a set of tables in a relational databases.

Related information

[How to Design a Mondrian Schema](#)

Relational Online Analytic Processing (ROLAP)

An alternative to MOLAP (Multidimensional OLAP) technology. While both ROLAP and MOLAP analytic tools are designed to allow analysis of data through the use of a multidimensional data model, ROLAP differs significantly in that it does not require the pre-computation and storage of information. Instead, ROLAP tools access the data in a relational database and generate SQL queries to calculate information at the appropriate level when an end user requests it. With ROLAP, it is possible to create additional database tables (summary tables or aggregations) which summarize the data at any desired combination of dimensions.

Related information

[ROLAP Overview](#)

Snowflake Schema

A way of arranging tables in a relational database such that the entity relationship diagram resembles a snowflake in shape. At the center of the schema are fact tables which are connected to multiple dimension tables. Thus a snowflake simplifies to a star schema when relatively few dimensions are used. The star and snowflake schemas are most commonly found in data warehouses where the speed of data retrieval is more important than the speed of insertion. As such, these schemas are not normalized much, and are frequently left in third normal form or second normal form.

Related information

[Snowflake Schema](#)